

Brush Seal Kit Installation



Included with Brush Seal Kit:


- 1) Top Brush Seal: Straight Holder x 2" or 3" Brush
- 2) Side Brush Seal: 45deg Holder x 2" or 3" Brush
- 3) Fasteners: Self-drilling fasteners included with brush seal kit

Tools Required:

- 1) Screw gun / Drill
- 2) 1/4" hex-head driver bit for screwing in fasteners
- 3) 1/8" drill bit for pre-drilling holes in Aluminum Holders
- 4) Hack saw or chop-saw for cutting down Aluminum Holders (if req)
- 5) Bolt cutter for cutting down brush (if req)




Step 1: Remove any existing weather stripping from around the perimeter of the door

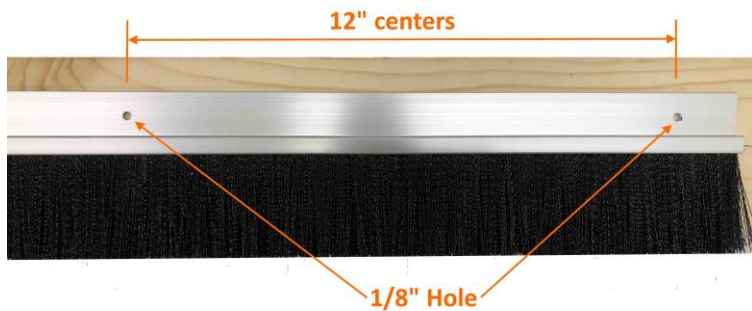

Step 2:
Pre-drill 1/8" holes in aluminum holder at 12" centers. 9 holes per 8ft holder.

Tops: Straight Holder + Brush

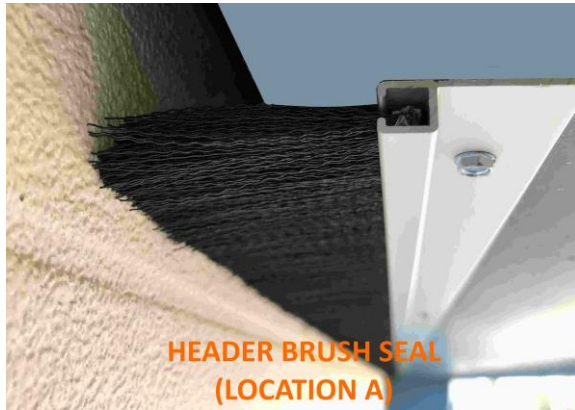

Step 5: The header seal will use the straight brush seal which allows the door to move freely up and down.

Step 3: Mount the 8' Lg Straight Brush Seal across the exterior top of the door header using the fasteners provided (1/4" driver bit). If the header is heavy gauge steel use a 5/64" drill bit to pre-drill hole for fasteners. Ensure the brush is making contact with the door panel across the entire length.



Step 4: If your brush seal kit is 10' wide +, you will have received 2 straight brush seals. Continue the brush seal across the header – cut back if brush seal is too long.
Cutting – separate brush from holder:
Brush – use bolt cutter; Aluminum holder – use hack saw or chop saw



Sides: 45deg Holder + Brush



Step 5: The side seals will use the 45deg brush seal which keep bristles facing towards the center of the door and constant pressure on the door face.

Step 6: Starting from the bottom mount the 8' brush to the exterior jamb.



Step 7: If your brush seal kit is 10' high +, you will have received 2 45deg brush seals. Continue the brush seal up to the header brush seal – cut back if the brush seal is too long.

Step 8: The brush seals won't line up in the corner due to the 45deg and straight holder being offset differently.

Step 9: Open and Close the door to ensure a proper seal.

Thanks for your business!

Any question call 414.403.1625 or email jason@jacorinc.com

JaCor, Inc. • S83W18346 Saturn Drive • Muskego, WI 53150

jason@jacorinc.com • Phone: 414.403.1625

www.jacorinc.com