



## BRUSH SEAL INSTALLATION GUIDE



**Tools Required**  
Drill, Tape Measure, Hammer  
1/4" hex-head driver bit for screwing in fasteners  
1/8" drill bit for pre-drilling holes in aluminum holders  
Hack saw for cutting down aluminum holders (if req)  
Bolt-cutter for cutting down brush (if req)



**Step 1:** Measure the overall length required and cut down the brush and aluminum holder as needed.

**Step 2:** To cut down the assembly, separate the brush from the aluminum holder by sliding the brush out of the holder.




**Step 3:** Cut the brush seal with a bolt cutter to the desired length. Once cut insert brush back into the aluminum holder. *(If you don't have a bolt cutter use a hack saw and then crimp the cut ends with a plyers)*



**Step 4:** Cut the aluminum holder with a hack saw to the desired length.



**Step 5:** Slide brush back into aluminum holder

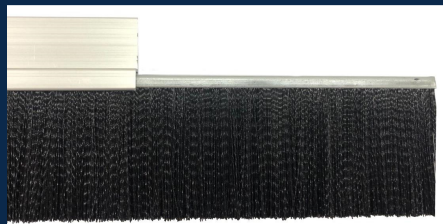

**Step 6:** Crimp or tap with hammer Both ends of the aluminum holder to securely hold brush in place. If mounting several brushes in a row just crimp the far ends of the brush run.

